

## CHIPBOARD SCREWS PZ FLAT HEAD, RIBS UNDER HEAD AND PARTIAL THREAD

🇮🇹 TSP PZ CON ALETTE FILETTO PARZIALE 
 🇩🇪 FLACHSENKOPF PZ-ANTRIEB UND FRÄSRIPPEN TEILGEWINDE 
 🇫🇷 TÊTE FRAISÉE PZ AVEC AILLETES S/TÊTE FILETAGE PARTIEL 
 🇪🇸 CABEZA PLANA ESTRIADO PZ ROSCA PARCIAL 
 🇷🇺 ПОТЯИНАЯ САМОЗЕНКУЮЩАЯ ГОЛОВКА PZ ЧАСТИЧНАЯ РЕЗЬБА

05152  
TSP PZ PT



TG 52 NEW FINISHING  
YELLOW ZINC Cr3  
CrVI FREE




C1022



Specific field of application: fastening of very thick wood and/or wood parts.

Campo specifico di applicazione: fissaggio di particolari in legno e/o legno di elevato spessore.

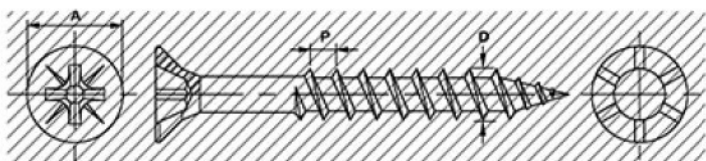

Diametri	Limits	A	D	P	PZ
3,5	Min.	6,40	3,35	-1,80	2
	Max	6,70	3,55		
4,0	Min.	7,40	3,80	-2,00	2
	Max	7,70	4,10		
4,5	Min.	8,20	4,30	-2,20	2
	Max	8,50	4,60		
5,0	Min.	9,20	4,75	-2,60	2
	Max	9,50	5,10		
6,0	Min.	10,90	5,75	-3,10	3
	Max	11,40	6,20		

■ Carbon steel: C1022  
■ Case hardness: HV 560 Min  
■ Core hardness: HV 330-420  
■ Threaded section: as per listing  
 [Ex 3,5x30/18 = thread 18]

■ Acciaio temperato: C1022  
■ Durezza superficiale: HV 560 Min  
■ Durezza a cuore: HV 330-420  
■ Parte filettata: come da listino  
 [Es. 3,5x30/18 = filetto 18]