



## The ideal screw for laying solid-wood flooring


The flooring screw for OSB and chip boards with *4CUT* and fixing thread minimises occurrence of creaking noises in the floor construction.

The SPAX flooring screw almost countersinks by itself thanks to the milled ribs on the head. In addition, the special T-STAR *plus* recess prevents the BIT from slipping, therefore ensuring an ideal distribution of the torque. The fixing thread allows a solid and permanent connection of two wood components. It effectively reduces creaking caused in the floor structure. The *4CUT* minimises wood splitting.



### The features

- **4CUT**  
no pre-drilling (wood-dependent), its point effectively reduces the splitting effect. The square end pushes aside the fibre of the wood and reduces the screwing-in torque.
- **Ground serrations**  
for quick and secure fastening.
- **Fixing thread**  
allows safe and lasting connection of two pieces of wood.
- **MULTI Head**  
flush countersinking. Mills in wood.

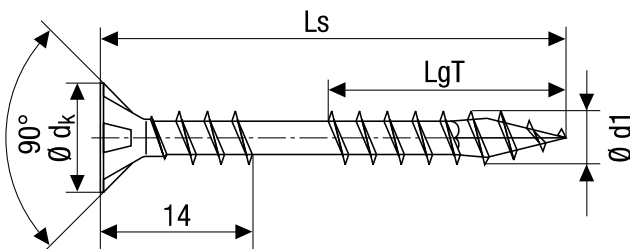

## Flat countersunk head, T-STAR *plus*

*4CUT, MULTI Head, fixing thread, case hardened, slide-coated*



A9J



Dimensions [mm]				Packaging units			SPAX-No.	EAN code
Thread Ø d1	Length total Ls	Length partial thread LgT	BIT size T	SPAX BOX [pieces]	Master carton [pieces]	Pallet qty		
<b>4.5</b> Ø dk = 8.8 mm	50	21	20	500	5,000	140,000	0541010450505	4003530246906
	60	26	20	500	5,000	140,000	0541010450605	4003530246913
	70	31	20	500	2,500	140,000	0541010450705	4003530246920
	80	31	20	200	2,000	64,000	0541010450805	4003530246937