


CHIPBOARD SCREWS PZ RAISED OVAL HEAD

TESTA GOCCIA DI SEGO PZ LINSSENKOPF PZ-ANTRIEB TÊTE FRAISÉE BOMBÉE PZ CABEZA GOTA SEBO PZ ПОЛУПОТЯЙНАЯ ГОЛОВКА PZ



Universal screws suitable for various uses on natural woods, chipboards, particle boards, plastic materials, plugs and thin platings.

Viti universali che si prestano a svariati utilizzi su legni naturali, pannelli truciolari, compensati, materie plastiche, tasselli e lamiere sottili.

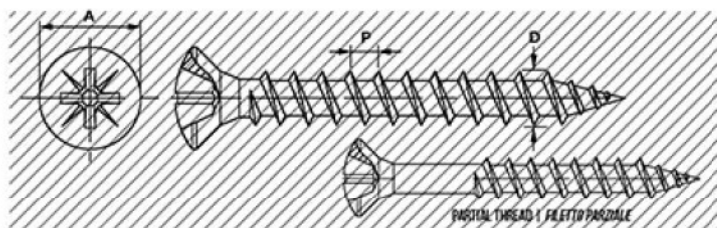

Carbon steel: C1022
Case hardness: HV 470-720
Core hardness: HV 320-430
Threaded section: as per listing
(Ex 3,5x50/40 = thread 40)

Acciaio temperato: C1022
Durezza superficiale: HV 470-720
Durezza a cuore: HV 320-430
Parte filettata: come da listino
(Es. 3,5x50/40 = filetto 40)

Diameters Diametri	Limits Limiti	A	D	P	PZ
3,0	Min.	5,50	2,75	~1,50	1
	Max	5,80	3,05		
3,5	Min.	6,40	3,35	~1,80	2
	Max	6,70	3,55		
4,0	Min.	7,40	3,80	~2,00	2
	Max	7,70	4,10		
4,5	Min.	8,20	4,30	~2,20	2
	Max	8,50	4,60		
5,0	Min.	9,10	4,75	~2,60	2
	Max	9,50	5,10		