

CONCRETE SCREWS TX 30 CYLINDER HEAD DIAM. 7,5 MM

TESTA CILINDRICA TX ZYLINDERKOPF TX-ANTRIEB TÊTE CYLINDRIQUE TX CABEZA CILÍNDRICA TX ЦИЛИНДРИЧЕСКАЯ ГОЛОВКА, ШЛИЦ TX



Newly-designed screws mostly used on concrete, full masonry or perforated bricks for the fixture of doors and windows in aluminium, PVC and wood without the use of blocks or chemical compounds. Main field of application: doors and windows frames. Specific for aluminium or PVC frames. Usable with inserts.


Viti di nuova concezione prevalentemente impiegate su calcestruzzo, muratura piena o mattoni forati per il fissaggio di porte e finestre in alluminio, PVC e legno senza l'impiego di tasselli o composti chimici. Campo di utilizzo principale: telai di porte e finestre. Specifica per telai in alluminio o PVC. Utilizzabili con inserti.

DIAM. 7,5

BIT TX

INCLUDED
INCLUSO

Diameters Diametri	Limits Limiti	A	H	d1	P	TX
7,5	Min.	8,35	2,80	7,30	2,30	T30
	Max	8,50	3,30	7,60	±10%	

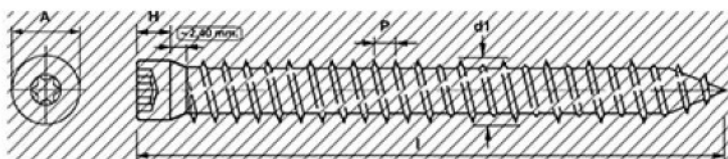

The last pitches with HI-LO screw-thread
Parte finale della filettatura con filetto HI-LO

Carbon steel: C1022
Case hardness: HV 560 Min
Core hardness: HV 315-390

Acciaio temperato: C1022
Durezza superficiale: HV 560 Min
Durezza a cuore: HV 315-390

AMBROVIT ON
YouTube



VIDEO TUTORIAL

