

## CHIPBOARD SCREWS PZ FLAT HEAD


🇮🇹 TESTA SVASATA PIANA PZ 
 🇩🇪 FLACHSENKOPF PZ-ANTRIEB 
 🇫🇷 TÊTE FRAISÉE PZ 
 🇪🇸 CABEZA PLANA PZ 
 🇷🇺 ПЛОСКАЯ ПОТЯЙНАЯ ГОЛОВКА PZ

05052  
TSP PZ



Universal screws suitable for various uses on natural woods, chipboard, particle board, plastic materials, plugs and thin platings.

Viti universali che si prestano a svariati utilizzi su legni naturali, pannelli truciolari, compensati, materie plastiche, tasselli e lamiere sottili.

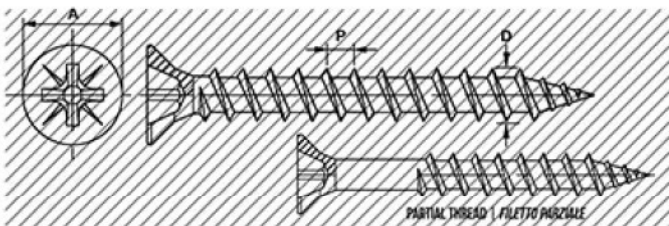

■ Carbon steel: C1022  
■ Case hardness: HV 470-700  
■ Core hardness: HV 300-420  
■ Threaded section: as per listing  
 [Ex 3,5x50/40 = thread 40]

■ Acciaio temperato: C1022  
■ Durezza superficiale: HV 470-700  
■ Durezza a cuore: HV 300-420  
■ Parte filettata: come da listino  
 [Es. 3,5x50/40 = filetto 40]

C1022

Diametri Diametri	Limits Limiti	A	D	P	PZ
2,5	Min.	4,70	2,35	-1,20	1
	Max	5,00	2,50		
3,0	Min.	5,50	2,75	-1,50	1
	Max	5,80	3,05		
3,5	Min.	6,40	3,35	-1,80	2
	Max	6,70	3,55		
4,0	Min.	7,40	3,80	-2,00	2
	Max	7,70	4,10		
4,5	Min.	8,20	4,30	-2,20	2
	Max	8,50	4,60		
5,0	Min.	9,20	4,75	-2,60	2
	Max	9,50	5,10		
6,0	Min.	10,90	5,75	-3,10	3
	Max	11,40	6,20		